


Title: Optical Material / Crystals (Infrared)
Material / Specification: Sapphire for 0.17 to 5.5 micron Transmission
Range / Description: OPM-Sapphire

Tel: +44 (0) 1622 859444
 Fax: +44 (0) 1622 859555
 info@knightoptical.co.uk
 http://www.knightoptical.co.uk

Glass-like. Sapphire (Al_2O_3) is an extremely hard material which is useful for UV, NIR and IR applications through 5 microns.

Internal Transmittance

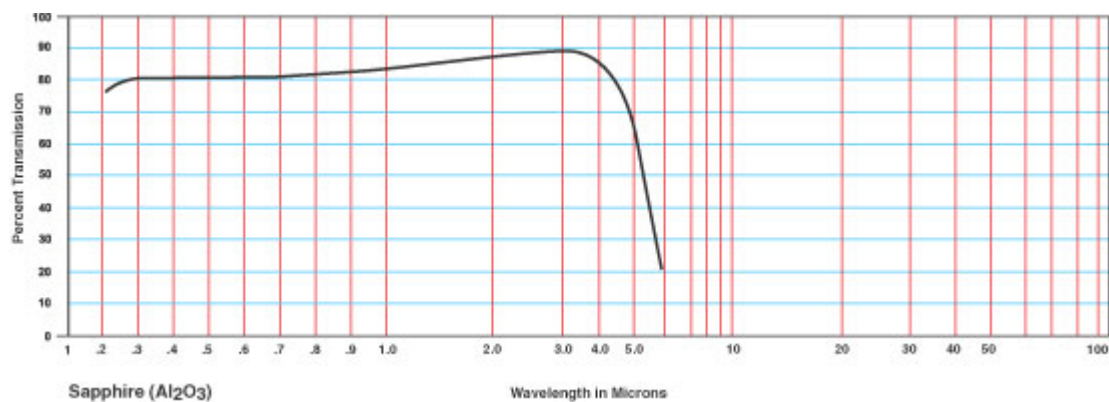

Internal Transmittance $t_i(\lambda)$ vs. wavelength λ										
$\lambda, \mu\text{m}$	0.2	0.5	1.0	3.0	5.0	—	—	—	—	—
$\tau_i(\lambda)$	0.79	0.97	0.97	0.97	0.45	—	—	—	—	—

Refractive Index n vs. Wavelength λ n_o = ordinary n_e = extraordinary																
μm	0.22	0.24	0.28	0.33	0.44	0.51	0.63	0.75	0.82	1.32	2.24	3.33	4.34	5.26	—	—
n_o	1.87	1.84	1.82	1.80	1.78	1.77	1.76	1.76	1.75	1.75	1.73	1.70	1.65	1.60	—	—
n_e	1.86	1.83	1.81	1.79	1.77	1.76	1.75	1.75	1.75	1.74	1.72	1.69	1.65	1.59	—	—

Optical Properties	
Transmission Range	0.17 to 5.5 μm
Refractive Index	n_o 1.75449; n_e 1.74663 at 1.06 μm
Refractive Loss	14% at 1.06 μm
Crystal/Class Structure	Trigonal (hex), R3c
Cleavage Plane	(1011),(1012), imperfect

Thermal Properties	
Thermal Expansion	5.6 (para) & 5.0 (perp) $\times 10^{-6}/\text{K}^*$
Thermal Conductivity	27.21 $\text{W m}^{-1} \text{K}^{-1}$ at 300K
Melting Point	2040°C
Specific Heat Capacity	419 $\text{J Kg}^{-1} \text{K}^{-1}$

Mechanical Properties	
Density	3.97 g/cc
Hardness (Knoop)	2000 with 2000g indenter
Youngs Modulus	335 GPa
Shear Modulus	148.1 GPa
Bulk Modulus	240 GPa
Poisson Ratio	0.25
Elastic Limit	300 MPa (45,000 psi)
Molecular Weight	101.96

Chemical Properties	
Solubility	98 $\times 10^{-6}$ g/100g water